

VDOT-DIP-SCI

DUAL INPUT MODULE WITH SCI



■ Features

- Loop powered.
- Provides two interfaces to NC/NO contact devices.
- SCI function.
- Supports Class A and Class B wiring.
- Status indicator LED.
- Address settable from 001 to 254 by a dedicated programmer.
- Single loop address.
- Low standby current (3mA).
- Mounts to optional 4-inch square junction box.

■ Description

VDOT-DIP-SCI Dual Input Module with Short Circuit Isolator is intended for use in addressable two wire systems. The module monitors and transmits the status (normal, open, short, or active) of devices equipped with NC/NO dry contacts to a control panel. The initiating device circuit (IDC) can be wired on Class A (Style D & E) or Class B (Style B & C).

Indicator


This module has three colored LED to indicate the status of Input, Polling and SCI.

SCI Function


The module has a built-in short circuit isolator. SCI circuit prevents entire loop failure in the event of a short between L+ and L- on the loop.

Mounting

The module can be mounted directly to 4-inch square electrical box. The box must have a minimum depth of 2 1/8 inches.

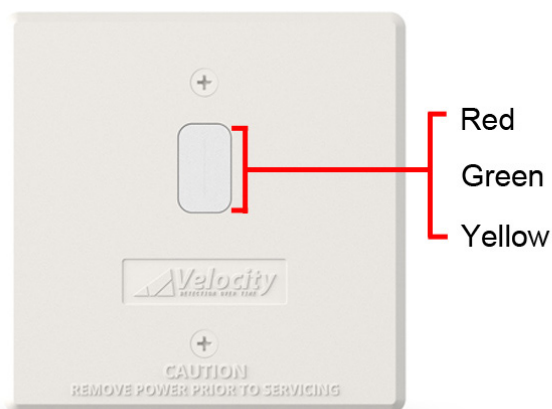


Input :Red
Polling:Green
SCI :Yellow

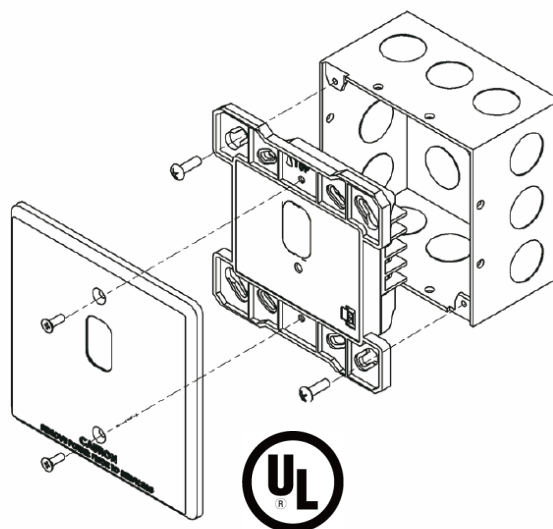


Wiring

Class B (Style B)

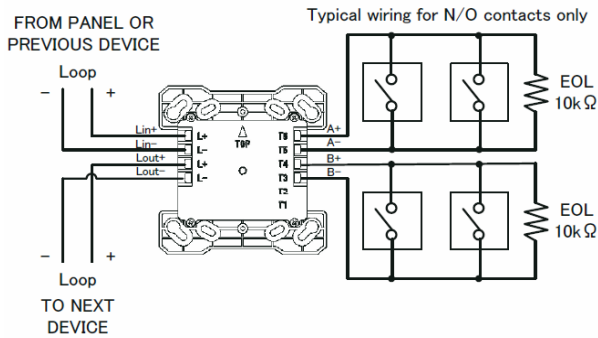


Setting	Value
Input Method	Normally Open
Open-Circuit Detection	Yes
Short-Circuit Detection	No

Class A (Style D)

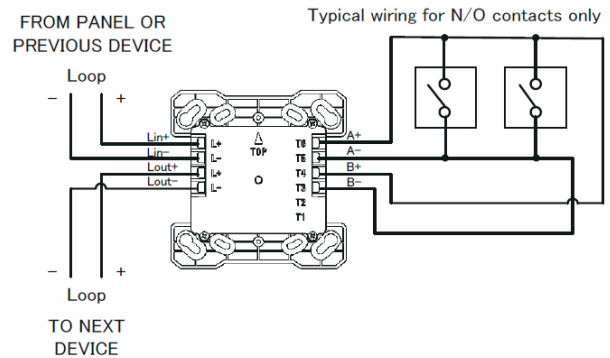

Setting	Value
Input Method	Normally Open
Open-Circuit Detection	Yes
Short-Circuit Detection	No


Class B (Style C)

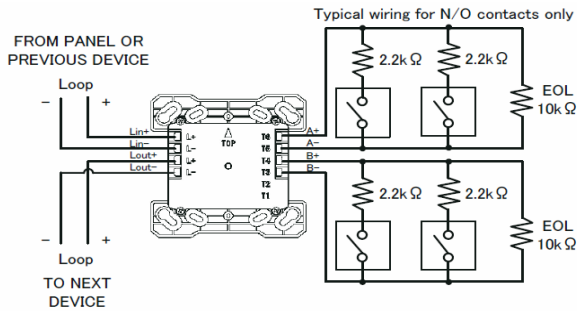

*2.2k Ω resistors are not included in EVA-DIP-SCI.
 *Up to two N/O contact devices can be connected to one input line.
 *If more than three devices are connected and operate at the same time, a short circuit is detected.

Setting	Value
Input Method	Normally Open
Open-Circuit Detection	Yes
Short-Circuit Detection	Yes

Class A (Style E)

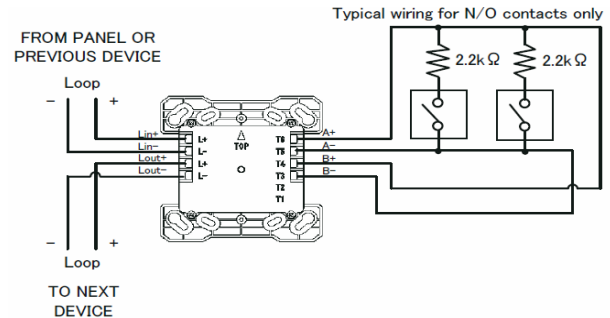

■ Subtype Settings

Sub-Type	Input Method	Open-Circuit Detection	Short-Circuit Detection	Class (Style)	Interupt
1	Normally Open	Yes	No	Class B (Style B)	Disabled
2					Enabled
3				Class A (Style D)	Disabled
4					Enabled
5	Normally Closed	No	Yes	Class B	Disabled
6					Enabled
7	Normally Open	Yes	Yes	Class B (Style C)	Disabled
8					Enabled
9				Class A (Style E)	Disabled
10					Enabled

The operation mode of the module can be switched by setting subtype as above. The subtype can be set through control panel programming.

■ Specifications

Specifications	VDOT-DIP-SCI
SLC Applied Voltage	Rated Range 20 to 38 VDC
SLC Current Consumption	Standby 3.0 mA Activated 16.9 mA (max)
SLC Line Impedance	Up to 50 Ω
Number of IDC (Initiating Device Circuit)	1 x Class A or 2 x Class B
IDC Circuit Rating	15 VDC, 2.2 k Ω , 6.8 mA (max)
IDC Line Impedance	Up to 50 Ω
EOL Device	RE-10 k (10 k Ω , 1/4 W) (Included) 2.2 k Ω resistance required for each dry contact switch in subtype setting 7, 8, 9 and 10
SCI on Resistance	0.2 ohms (max)
SCI Fault Detection Threshold	10 V (min)
SCI Isolation Current	22 mA (max)
Visual Indicator (Status LED)	Polling LED (GREEN) Input LED (RED) SCI LED (YELLOW)
Ambient Installation Temperature	0 °C to 49 °C (32 °F to 120 °F)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Max Relative Humidity	Up to 93 % RH, non-condensing
Environment	Indoor dry use only
Max Quantity Per Loop	127 Units
Terminal	Screw AWG12 to 22
Address Setting	VDOT-AD2 Address Programmer
Dimensions	H 37.6 mm x W 69.8 mm x D 17.2 mm (1.460" H x 2.748" W x 0.677" D)
Weight	Approximately 34 g
Standard	UL864

All specifications are subject to change without any notice.
For more information, contact with VELOCITY.



Zeta Alarms Limited
72-78 Morfa Road, Swansea
SA1 2EN
Tel: +44 1792 455 175 FAX: +44 1792 455 176

Distributed By

<http://www.velocitydetection.com>

GLT-299-6-12 Rev.2