

## UL RESETTABLE CONVENTIONAL CALL POINT / NO/NC CONTACT



### Key Features

- Resettable call point simulates break glass activation with no broken glass while offering the user the benefits and environmental advantages of a resettable element.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electromechanical and electronic components).
- An indicator drops into view at the top of the window upon activation. The unit simply resets with a key and is immediately ready for re-use.
- Extremely attractive, high value look and feel: glass appearance maintains operator deterrence, while a visible warning flag confirms activation.
- Easy installation with no glass elements that could be broken or incorrectly fitted.
- Versatile mounting plate fits U.S., European, double-gang and single-gang mounting box.
- Powered by 2-wire DC 24V.
- Five colours available.


### Description

The Global ReSet is a unique resettable call point that simulates break glass activation with no broken glass. It is safe to use in areas where glass cannot be used such as food processing plants and common areas. As the units can be simply reset with a key, they provide an ideal solution for locations that suffer from a high number of false activations such as schools, shopping centres and public areas.

### How it Works

The 'ReSet' uses a simple yet ingenious patented mechanism which consists of a rigid plastic operating element and an over the center spring mechanism. This arrangement provides the feel of real action on operation and simulates break glass activation. Global ReSet is a single-action non-coded initiating station. The signal is activated by pushing the clear operating plate (indicated by the arrows and hand symbol). Once activated, a yellow and black warning flag drops into view. To reset, a special key is inserted into a hole in the bottom and rotated. This eliminates the maintenance requirement to replace broken glass.

### Dimensions

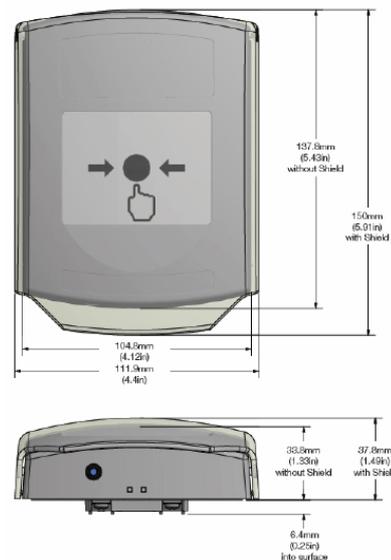

### Product Codes

Flush Mount	VR-RF-01
Surface Mount	VR-RS-01

All specifications are subject to change without any notice.  
For more information, contact with VELOCITY.



Zeta Alarms Limited  
72-78 Morfa Road, Swansea  
SA1 2EN  
Tel: +44 1792 455 175 FAX: +44 1792 455 176

Distributed By